


- Designed for accurate and fast cutting of thin and delicate sheets
- Spring hold-down device
- Ram driven by hydraulic (VH) or pneumatic (VP) cylinder
- Control through electrovalve
- Structure without base

RANGE AND FEATURES

Model	Max. width (mm)	Max. thickness (mm)	Weight (kg)
1721 A VP	200	1.2	100
1721 B VP	300	1.2	120
1721 A VH	200	2.5 (or 50 x 3)	90
1721 B VH	300	2.0 (or 50 x 2.5)	110

DIMENSIONS

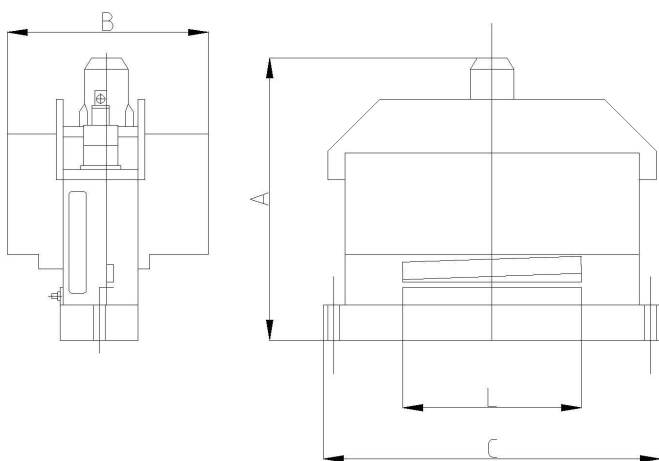

Model	L	A	B	C
1721 A VP	210	560	350	485
1721 B VP	310	485	350	585
1721 A VH	210	450	160	485
1721 B VH	310	450	160	585