




- Designed for accurate and fast cutting of thin and delicate sheets
- Shears with cutting edge under the hold-down device, driven by pneumatic cylinder
- Control through electrovalve
- Structure without base

## RANGE AND FEATURES

Model	Max. width (mm)	Max. thickness (mm)	Weight (kg)
<b>1722 X</b>	75	0.8	34
<b>1722 A</b>	150	1.1	42

## DIMENSIONS

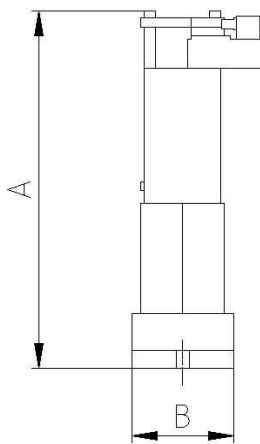

Model	L	A	B
<b>1722 X</b>	229	340	140
<b>1722 A</b>	387	422	140

