




- Designed for accurate and fast cutting of thin and delicate sheets
- Knuckle joint shears driven by pneumatic cylinders
- Spring hold-down device
- Control through electrovalve
- Structure without base

RANGE AND FEATURES

Model	Max. width (mm)	Max. thickness (mm)	Weight (kg)
1725 C	400	1.5	180
1725 E	650	1.0	220
1725 F	800	0.8	280
1725 G	1000	0.5	360

DIMENSIONS

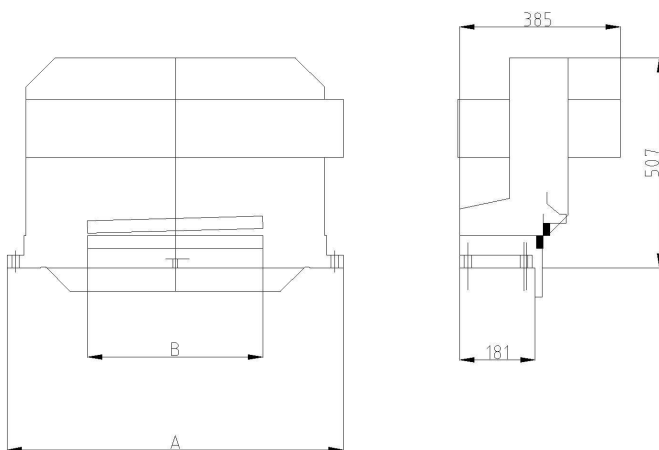

Model	A	B
1725 C	806	420
1725 E	996	670
1725 F	1146	820
1725 G	1346	1020